



PLUMA EV



Salt water chlorinator with digital display and highly resistant polycarbonate enclosure. Production capacities from 8 to 25 g/h, ideal for private pools up to 150m³.

- › Self cleaning monopolar cells 35% more efficient than bipolar units
- › Switching power supply for less heat and higher performance
- › LCD front panel with intuitive sequential menu
- › Central command button and on-off side switch
- › Adjustable sanitizer output from 0% to 100%
- › Standby input contact for external controllers
- › More compact, lighter and easier to install
- › Electronic electrolysis time meter
- › Electronic cover detector
- › Electronic flow detector

| Specifications |

Power Supply: 220/240Vac 50/60Hz
Cell: Self cleaning monopolar MMO coating
Cell Assembly: vertical and horizontal
Cell connections: ø63mm (ø50mm adaptor)
Cell Lifetime: 10.500h*
Salinity Range: 3 to 5 Kg/m³ (possible adjustment)
Water Flow: From 5 m³/h to 30 m³/h
Water Pressure: Tested at 5 Bar
Water Temperature Range: 12°C to 40°C
Room Temperature: Tested at 50°C
Reverse Polarity: 3h - 6h
Cooling: forced with ventilation
Warranty: 2 Years




w275mm X h285mm X L125mm

w315mm ø63mm

* Lifetime can vary based on the salinity level, reverse polarity running cycle and water chemical balance.



Extendend Life Cell



Hours



Low Weight




Polycarbonate Box (PC)



Low Consumption



Warranty

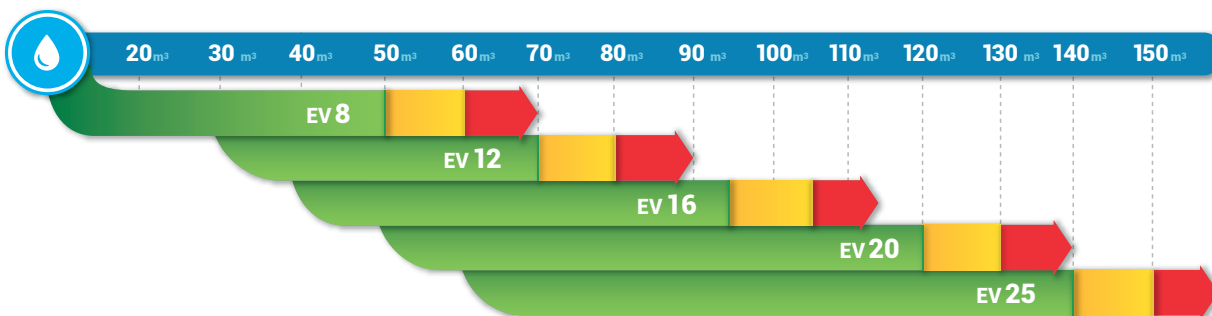

PLUMA EV MODELS

CODE	MODEL	CHLORINE PRODUCTION g/h
100001184 ^A	Pluma EV8	8
100001185 ^A	Pluma EV12	12
100001186 ^A	Pluma EV16	16
100001187 ^A	Pluma EV20	20
100001188 ^A	Pluma EV25	25