


Fresh water chlorinator with digital display, temperature sensor and highly resistant polycarbonate enclosure. Ideal for indoor pools with metallic elements affected by salt.

- Latest generation power supply, with higher performance, low electrical consumption and fully waterproof (IP67 protection)
- Works with a concentration of mineral salts between 0.5 to 1.5 g/l
- Lightweight, compact and easy to install system
- A single command button and a switch to turn on and off
- Large LCD display with simple and intuitive menu
- Temperature probe with automatic hibernation function
- Electronic flow and coverage detector
- Electronic electrolysis time meter
- Standby input contact for external controllers





| Specifications |

Power Supply: 220/240VAC 50/60Hz
Cell: Monopolar, with self cleaning function and double MMO coating
Cell Assembly: Vertical and horizontal
Cell Connections: ø63mm or ø50 mm (rings included)
Cell lifetime: 6.000h*
Salinity Range: 0.5 to 1.5 g/l (10% of standard chlorinators)
Water Flow: From 5 m³/h to 30 m³/h
Water Pressure: Tested at 5 Bar
Water Temperature Range: From 12°C to 40°C
Room Temperature: Tested at 50°C
Reverse Polarity: From 3h to 8h
Cooling: Convection with integrated heat sink
Warranty: 2 Years

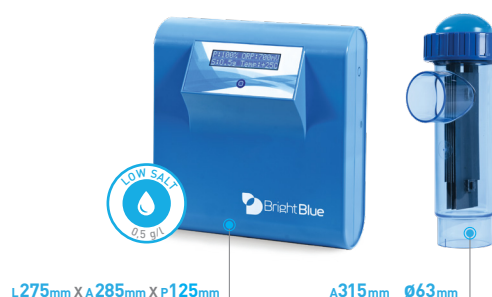

* Lifetime can vary based on the salinity level, reverse polarity running cycle and water chemical balance.

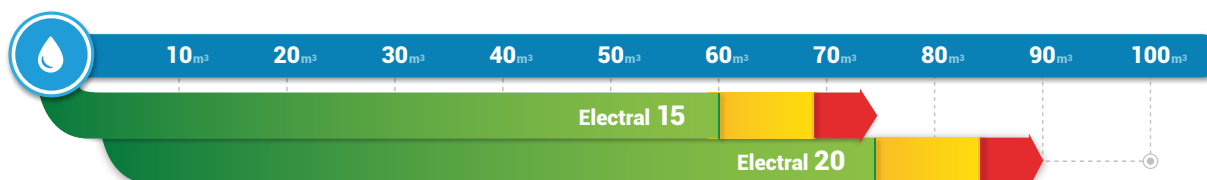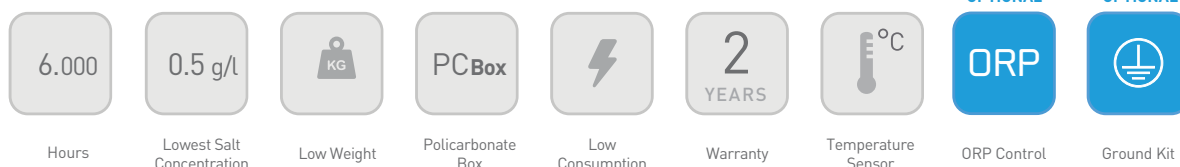

ELECTRAL MODELS

| | | |
|----------------|--------------------|-------------------------|
| CODE 100002165 | MODEL Electral 15A | CURRENT IN THE CELL 15A |
| CODE 100002166 | MODEL Electral 20A | CURRENT IN THE CELL 20A |