



Salt water chlorinator with automatic production depending on chlorine reading (ORP) and water temperature. Digital display and highly resistant polycarbonate enclosure. Production capacities from 5 to 30 g/h. Ideal for private pools up to 180 m³.

- › Latest generation power supply, with higher performance, low electrical consumption and fully waterproof (IP67 protection)
- › Works with any kind of salinity from 3 g/l to sea water (35 g/l)
- › A single command button and a switch to turn on and off
- › New ultra-efficient electrolysis cell with 10.500h life span
- › Large LCD display with simple and intuitive menu
- › Temperature probe with automatic hibernation function
- › Electronic flow and coverage detector
- › Lightweight, compact and easy to install system
- › Electronic electrolysis time meter
- › Standby input contact for external controllers



[Specifications](#)



Power Supply: 220/240VAC 50/60Hz
Cell: Monopolar, with self cleaning function
Cell Assembly: Vertical and horizontal
Cell Connections: ø63mm or ø50 mm (rings included)
Cell lifetime: 10.500h*
Salinity Range: 3 to 35 g/l (sea water)
Water Flow: From 5 m³/h to 30 m³/h
Water Pressure: Tested at 5 Bar
Water Temperature Range: From 12°C to 40°C
Room Temperature: Tested at 50°C
Reverse Polarity: From 3h to 8h
Cooling: Convection with integrated heat sink
Warranty: 2 Years



75mm X A 285mm X P 125mm

A 315mm X Ø 63mm

* Lifetime can vary based on the salinity level, reverse polarity running cycle and water chemical balance.

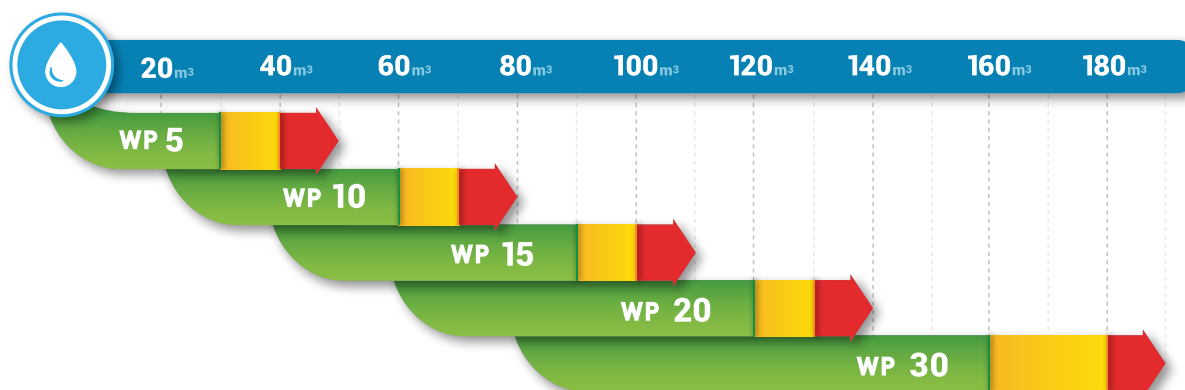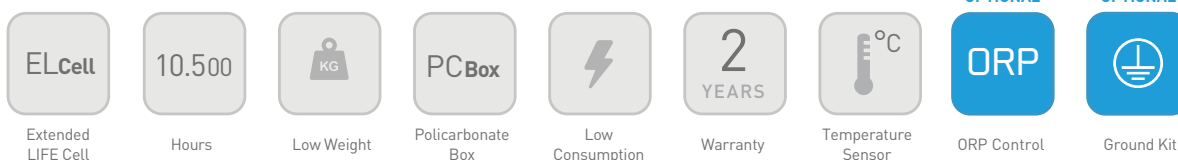

PLUMA WP MODELS

CODE 100002671	MODEL Pluma WP 5	POOL WITH VOLUME UP TO M³ 30
CODE 100002672	MODEL Pluma WP 10	POOL WITH VOLUME UP TO M³ 60
CODE 100002673	MODEL Pluma WP 15	POOL WITH VOLUME UP TO M³ 90
CODE 100002674	MODEL Pluma WP 20	POOL WITH VOLUME UP TO M³ 120
CODE 100002675	MODEL Pluma WP 30	POOL WITH VOLUME UP TO M³ 160

Salt water chlorinator with automatic production depending on chlorine reading (ORP) and water temperature. Digital display and highly resistant polycarbonate enclosure. Production capacities from 10 to 40 g/h. Ideal for private pools up to 240 m³.

- > Latest generation power supply, with higher performance, low electrical consumption and fully waterproof (IP67 protection)
- > Works with any kind of salinity from 3 g/l to sea water (35 g/l)
- > Lightweight, compact and easy to install system
- > A single command button and a switch to turn on and off
- > New ultra-efficient electrolysis cell with 15.000h life span
- > Large LCD display with simple and intuitive menu
- > Temperature probe with automatic hibernation function
- > Electronic flow and coverage detector
- > Electronic electrolysis time meter
- > Standby input contact for external controllers



Specifications

Power Supply: 220/240VAC 50/60Hz

Cell: Monopolar, with self cleaning function and double MMO coating

Cell Assembly: Vertical and horizontal

Cell Connections: ø63mm or ø50 mm (rings included)

Cell lifetime: 15.000h*

Salinity Range: 3 to 35 g/l (sea water)

Water Flow: From 5 m³/h to 30 m³/h

Water Pressure: Tested at 5 Bar

Water Temperature Range: From 12°C to 40°C

Room Temperature: Tested at 50°C

Reverse Polarity: From 3h to 8h

Cooling: Convection with integrated heat sink

Warranty: 5 Years Electronic / 4 Years Cell




75mm X A285mm X P125mm



A315mm X Ø63mm

* Lifetime can vary based on the salinity level, reverse polarity running cycle and water chemical balance.

Extended
LIFE Cell

Hours



Low Weight



Polycarbonate
Box



Low
Consumption



Warranty

Temperature
Sensor

ORP Control



Ground Kit



COLIBRI WP MODELS

CODE 100002676	MODEL Colibri WP 10	POOL WITH VOLUME UP TO M³ 60
CODE 100002677	MODEL Colibri WP 15	POOL WITH VOLUME UP TO M³ 90
CODE 100002678	MODEL Colibri WP 20	POOL WITH VOLUME UP TO M³ 120
CODE 100002679	MODEL Colibri WP 30	POOL WITH VOLUME UP TO M³ 160
CODE 100002680	MODEL Colibri WP 40	POOL WITH VOLUME UP TO M³ 210


Fresh water chlorinator with digital display, temperature sensor and highly resistant polycarbonate enclosure. Ideal for indoor pools with metallic elements affected by salt.

- Latest generation power supply, with higher performance, low electrical consumption and fully waterproof (IP67 protection)
- Works with a concentration of mineral salts between 0.5 to 1.5 g/l
- Lightweight, compact and easy to install system
- A single command button and a switch to turn on and off
- Large LCD display with simple and intuitive menu
- Temperature probe with automatic hibernation function
- Electronic flow and coverage detector
- Electronic electrolysis time meter
- Standby input contact for external controllers





| Specifications |

Power Supply: 220/240VAC 50/60Hz
Cell: Monopolar, with self cleaning fuction and double MMO coating
Cell Assembly: Vertical and horizontal
Cell Connections: ø63mm or ø50 mm (rings included)
Cell lifetime: 6.000h*
Salinity Range: 0.5 to 1.5 g/l (10% of standard chlorinators)
Water Flow: From 5 m³/h to 30 m³/h
Water Pressure: Tested at 5 Bar
Water Temperature Range: From 12°C to 40°C
Room Temperature: Tested at 50°C
Reverse Polarity: From 3h to 8h
Cooling: Convection with integrated heat sink
Warranty: 2 Years

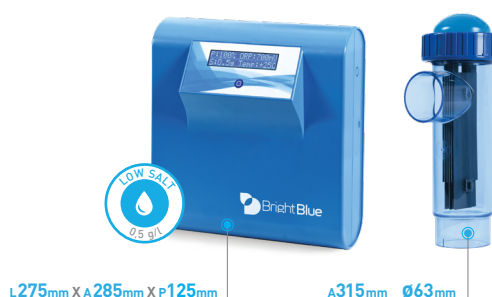

* Lifetime can vary based on the salinity level, reverse polarity running cycle and water chemical balance.

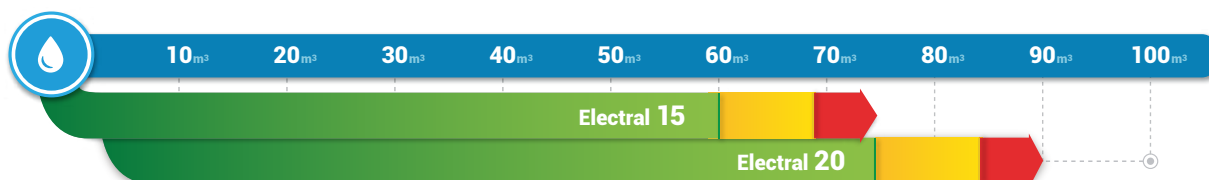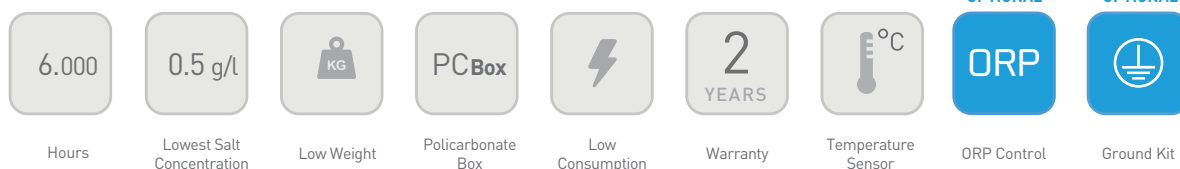

ELECTRAL MODELS

CODE 100002165	MODEL Electral 15A	CURRENT IN THE CELL 15A
CODE 100002166	MODEL Electral 20A	CURRENT IN THE CELL 20A

Automatic water level regulator comprising a head box and four level sensors.
Suitable for all type of pools: overflow, mirror and skimmer.

- Check valve failure detector to prevent involuntary pool emptying
- Rain detector that allows system to be used during winter period
- Circulation pump protector to prevent dry work
- Compact four sensors kit for skimmer swimming pools (optional)
- Plug & Play System for automatic operation without programming
- Stainless steel ASI316 level sensors
- LED lights status indicator
- On-off side switch

Specifications

Power Supply: 220/240Vac 50/60Hz

Level Sensors: 4 units ASI316

Room Temperature: Tested at 50°C

Warranty: 2 Years

Solenoid Valve (Optional)

Valve: 1,0"

Pressure: 1 - 10 Bar

Debit: 0,05 - 9 m³/h



L140mm X A180mm X P65mm



Water Level Management



4 Sensors




Electro Valve



Plug & Play



Winter Mode



Warranty

Accessories



OPTIONAL



OPTIONAL



TACTUS MODELS

CODE	100000725	MODEL	Tactus	LEVEL SENSORS	ASI316
------	-----------	-------	--------	---------------	--------

Digital pH measuring and regulating system, for private, public and commercial pools.

- > Simple and intuitive programming menu (password protected)
- > Electronic timeout alarm to avoid pH overdosing
- > ENCODER system with easy friendly software interface
- > Auto calibration with 2 buffers or DPD
- > Very broad measuring range [0-13.8]
- > Highly accurate pH scale ± 0.01
- > Progressive pH injection (acid or base)
- > Long life pH electrode
- > pH tank level probe (optional)



| Specifications |

Power Supply: 220/240Vac 50/60Hz
pH Pump: Peristaltic
Injection Flowrate: 3 l/h
Injection Pressure: 2,5 Bar
Room Temperature: Tested at 50°C
Buffers: 4 and 7
Warranty: 2 Years



L 140mm X A 180mm X P 65mm




pH Scale




pH Precision




Encoder



Alarm



pH Probe
Long Life



Warranty

Accessories

Inox A4



Premium Probe

SANUS MODELS

CODE 100002681	MODEL SANUS NG	FLOW l/h - PRESSURE bar	3-2.5
CODE 100002273	DISCRIPTION	pH tank level probe with suction tube	

Digital Chlorine (ORP) measuring and regulating system, for private, public and commercial pools.
Two options available: Schuko Plug or Injection Pump.

- › Simple and intuitive programming menu (password protected)
- › Electronic timeout alarm to avoid excess of chlorine
- › ENCODER system with easy friendly software interface
- › Auto calibration with 2 buffers or DPD
- › Very broad measuring range (300 - 995mV)
- › Highly accurate ORP scale +/- 1mV
- › Long life ORP electrode
- › Cl tank level probe (optional)




| Specifications |

Version with Schuko Plug

Power Supply: 220/240Vac 50/60Hz
Schuko Output: 30A/240Vac/AC1 7.2KVa
Room Temperature: Tested at 50°C
Buffers: 240mV & 470mV
Warranty: 2 years

Version with Injection Pump

ORP Pump: Peristaltic
Injection Flow Rate: 3 l/h
Injection Pressure: 2,5 Bar

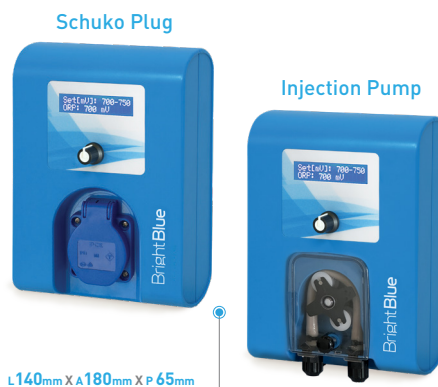

300↔995	±1			ELProbe	2 YEARS
ORP Scale	ORP Precision	Encoder	Alarm	ORP Probe Long Life	Warranty

Accessories



SENSUS MODELS

CODE	100002367	MODEL	SENSUS B	FLOW l/h - PRESSURE bar	3-2.5
CODE	100002368	MODEL	SENSUS S	SCHUKO POWER OUTPUT	220/240Vac

Swimming pool remote control system via WiFi and Bluetooth. Allows comprehensive management of the entire pool and its peripherals. Compatible with all water treatment systems, regardless of brand or model. Probably the most versatile home automation solution on the market.

- > Monitoring and control of water circulation, compatible with variable speed pumps
- > Chlorine level monitoring and control (ORP)
- > pH monitoring and control
- > Monitoring and control of pool lights
- > Water temperature monitoring
- > Salt level monitoring
- > Water flow monitoring
- > Filter pressure monitoring
- > Three extra outputs for controlling peripherals (waterfall, counter current, garden lights, others)
- > Simple and intuitive app
- > Easy installation without wiring



CENTRALISED CONTROL UNIT

Electrical supply : 220/240Vac 50/60Hz
Input probes : pH, ORP, Pressure, Flow and Temperature
Remote connection : WiFi and Bluetooth
Warranty : 2 years



Bsmart



Electrical supply : 220/240Vac 50/60Hz
Relay outputs: pH, Cl, Lights, Circulation pump
Warranty: 2 years

Bsmart PLUS



Electrical supply : 220/240Vac 50/60Hz
Relay outputs : pH, Cl, Lights, Circulation pump
Extra relay outputs : 3 free potential outputs
Additional outputs : RS485 and variable speed
Warranty: 2 years

Bsmart MODELS

CODE 100002503	MODEL BSmart	CODE 100002504	MODEL BSmart Plus
CODE 100002496	MODEL Pack Smart*	CODE 100002496	MODEL Pack Smart*
CODE 100002497	MODEL Pack Smart TDS**	CODE 100002497	MODEL Pack Smart TDS**

*Smart Pack includes: pH probes, ORP probe, temperature probe, flow sensor, pressure sensor, buffers and all installation accessories.

**Smart TDS Pack: adds a salt probe (TDS) to the previous pack.



MADE IN
EUROPE

WWW.BRIGHTBLUE.COM.PT

RUA PÉ DE MOURO N°33 • CESE III ARMAZÉM D • 2710-335 SINTRA • PORTUGAL

+351 211 341 310 • COMERCIAL@BRIGHTBLUE.COM.PT